



**ATOM OB**

**Surface LED spotlight  
with asymmetrical beam**

**Materials:**  
thermoplastic polymers, polycarbonate



**Finishes:**  
black, chrome plated, aluminium, satin nickel, matt white

**Light source:**  
LGP LED module



**Wiring:**  
2000mm

**Application type:**  
universal



**Installation:**  
surface



**Colour appearance** natural white  
**Colour temperature** 4000 K  
**Luminous flux** 195 lm  
**Luminous efficiency** 65 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3000 K  
**Luminous flux** 180 lm  
**Luminous efficiency** 60 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** super warm white  
**Colour temperature** 2700 K  
**Luminous flux** 180 lm  
**Luminous efficiency** 60 lm/W  
**CRI** Ra ≥ 80



ATOM OB




Watt & Volt	Light colour
3W @ 24Vdc	natural white
3W @ 24Vdc	warm white
3W @ 24Vdc	super warm white

LED CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



Finish
black
chrome plated
aluminium
satin nickel
matt white

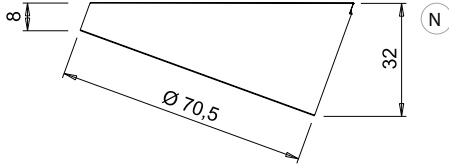

**N** This drawing shows the spotlight's overall dimensions. See installation manual for more details.

ATOM OB with 20° inclined support is installed on surface and against the vertical wall, allowing to easily hide the power cable at the back of the shelf. It is mounted simply by fixing the spacer with the two screws supplied, then applying the spotlight and pressing lightly. ATOM OB incorporates a special LED module with LGP diffuser ensuring a uniform projection beam without the dot effect.

## FINISHES



BLACK



CHROME PLATED



ALUMINIUM



SATIN NICKEL



MATT WHITE