




SWS
HARDWARE

FLEXILED AT6 TEMPERATURE CHANGING



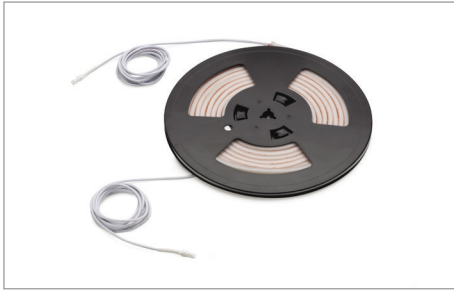



FLEXYLED AT6 Temperature Changing with double power cable



FLEXYLED AT6 D-M is supplied with a 3M® high-strength adhesive base and with hooks and screws for mechanical fastening to the surface.



An angle profile for the application of FLEXYLED AT6 D-M on surfaces with 90° angles is available on request.



values referring to FLEXYLED
AT6 D-M 1000mm

Colour appearance	D-Motion white
Colour temperature	2700 - 4000 K
Luminous flux	1220 lm/m
Luminous efficiency	122 lm/W
CRI	Ra 80

FLEXYLED AT6 TEMPERATURE CHANGING

flexible LED profile

FLEXYLED AT6 D-M is a dimmable D-Motion dual-colour light profile developed with silicone coating technology for diffusing a milky effect on a 6 mm wide flexible linear module with 156 +156 LEDs/m. Designed for surface and recessed installation, the profile can also be configured for installation on the corners of furniture elements. Supplied as standard with a high-strength adhesive base, separable every 38.4 mm (+6 LEDs), FLEXYLED AT6 D-M is available in 2000 mm, 3000 mm and 6000 mm reel lengths with double 2000 mm power cable and Micro24 male connector. Power supply not included. To be ordered separately.



white