





**FLEXYLED UHE6B**  
flexible linear LED roll without cable



On Request, a Plug&Play cable system, named CH6 is available, which allows you to create custom lengths of FLEXYLED LFS24280 from the roll without the need for complicated wire soldering. The set has a 2000mm power cord and different lengths of interconnecting cables for continuous installation




values referring to FLEXYLED UHE6B 1000mm 4200 K

Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3100 K	4200 K
Luminous flux	910 lm/m	940 lm/m	980 lm/m
Luminous efficiency	91 lm/W	94 lm/W	98 lm/W
CRI	Ra 90	Ra 90	Ra 90

# FLEXYLED UHE6B

## Flexible linear LED module

FLEXYLED UHE6B a dimmable single-colour light source developed on a 6mm-wide linear flexible module with 280 LED/m, designed for installation in profiles with a removable diffuser. The module, which can be divided at 25 mm (7 LED) intervals, is supplied with an adhesive base. FLEXYLED UHE6B available in 20 m long rolls without a power cable, compatible with the CH6 connection system. Modules with customised length, 2000 mm power cable and Micro24 male connector (pre-wired PW version) are available on request. Power supply not included. To be ordered separately.

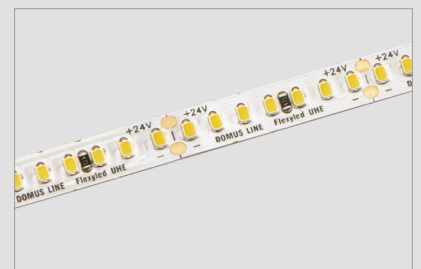

energy efficiency class referring to CCT 3100 K and 4200 K



energy efficiency class referring to CCT 2700 K