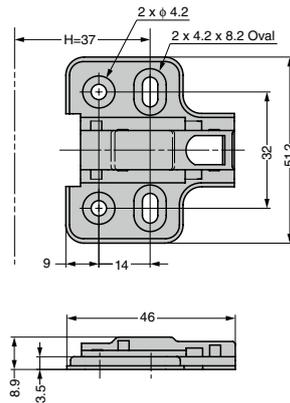


STAINLESS STEEL MOUNTING PLATE 180SUS-P6T

Latest
Info

- Mounting Plate for 180SUS Concealed Hinge.

SUS

Specifications

- Door Adjustment Function (± 2 mm up/down)
- Thickness: 0 mm (Standard Thickness)
- Passed the in-house neutral salt spray test, meeting the 480-hour corrosion resistance standard in accordance with ISO 9227 (equivalent to DIN EN 1670).

| RoHS | CAD | Item Code | Item Name | Material | Finish | Weight (g) | Carton |
|------|------|-------------|------------|--------------------------|------------------|------------|--------|
| - | 2030 | 160-056-880 | 180SUS-P6T | Stainless Steel (SUS304) | Barrel Polishing | 15 | 400 |


Door size and recommended hinge quantity

The number of hinges mounted varies according to the door dimensions. For doors of the same weight, a larger distance between the upper and lower hinges will enhance strength.

Generally, when using 3 hinges, the intermediate hinge should be a little higher than the centre point between the upper and lower hinges for enhanced strength.

Note: Use the figure only as a guideline.

■ 180SUS

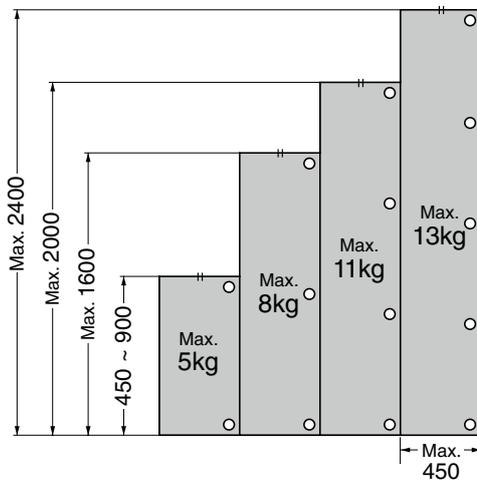

| Door Width | Door Thickness | Installation Pitch |
|------------|----------------|--------------------|
| Max. 450 | Max. 20 | Min. 300 |

Caution

- Set door centre of gravity at door centre.
- If you want to increase the door width, please increase the number of hinges accordingly.
- Attach the upper and lower hinges within 100 mm from the edge of the door. When using three or more, install at regular intervals.
- Figures shown in the diagram are only indicative. Please always test before finalising your design.
- Please contact us for any other configuration.
- All screw holes should be used.