



# LAMP DAMPER CATCH DC-200



- Damper and catch combination for sideways opening doors.
- Prevents doors from slamming.
- Holds doors in closed position.
- Easy to install by simply aligning body with the interior wall.
- Non-handed.
- Can handle doors up to 40 kg. (When using DC-200 - 40).
- Strike can be adjusted post-installation: horizontally  $\pm 5$  mm, vertically  $\pm 4$  mm.

### Recommended hinges

- Heavy Duty Concealed Hinge J95 (With catch type)
- 3way Adjustable Concealed Hinge HES3D-90
- Single axis furniture hinges


### Caution

- The screws for installing on sheet metal are not included. We recommend the following screws:  
Recommended screws for body: Cross binding head M4 x 30  
Recommended screws for counter plate: Cross binding head M4 x 15
- Do not install to body or strike to hollow surfaces.
- If there is a large resistant force during closing, the door may not close fully.

### Parts included


- Body Cover
- Counter
- Screws to attach body: 3.5 x 30
- Screws to attach counter: 3.5 x 15

### Installation Example

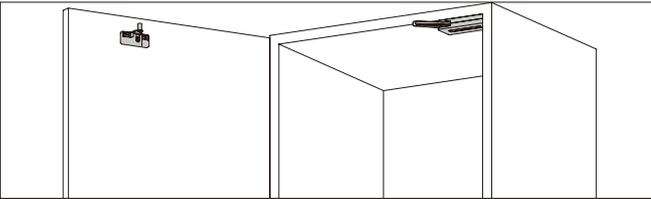


Attach to the interior of the cabinet.

### Body

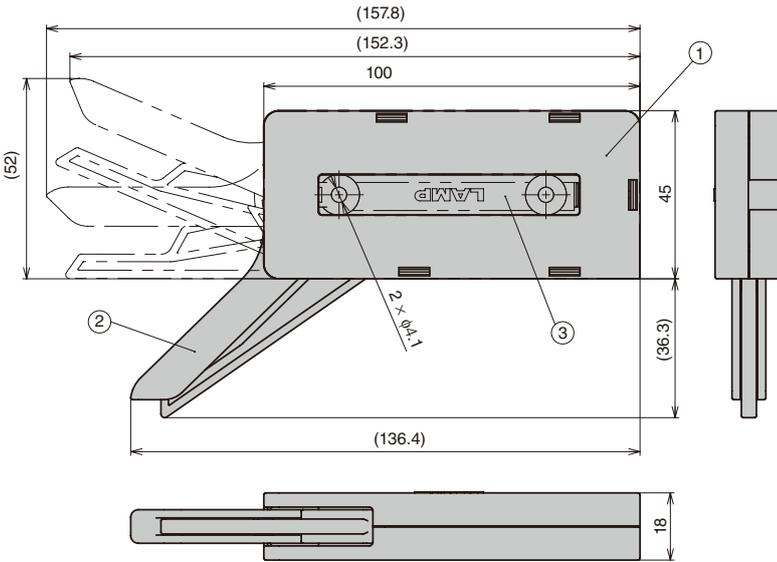


### Counter Plate

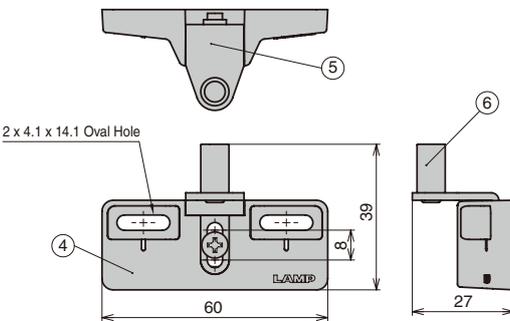

No.	Item Name	Materials	Finish/Colour
①	Body	PC/ABS	White / Black
②	Arm	PA	White / Black
③	Body Cover	ABS	White / Black
④	Counter	PC/ABS	White / Black
⑤	Counter Plate	Steel (SPCC)	Nickel Plating
⑥	Bumper	Elastomer	Gray

Item Code	Item Name	Colour	Door Width	Door Height	Load Capacity (kg)	Weight (g)
140-043-604	DC-200-25WT	White	450 - 900	Under 2400	7 - 25	105
140-043-605	DC-200-25BL	Black				
140-043-606	DC-200-40WT	White				
140-043-607	DC-200-40BL	Black				

**Installation**

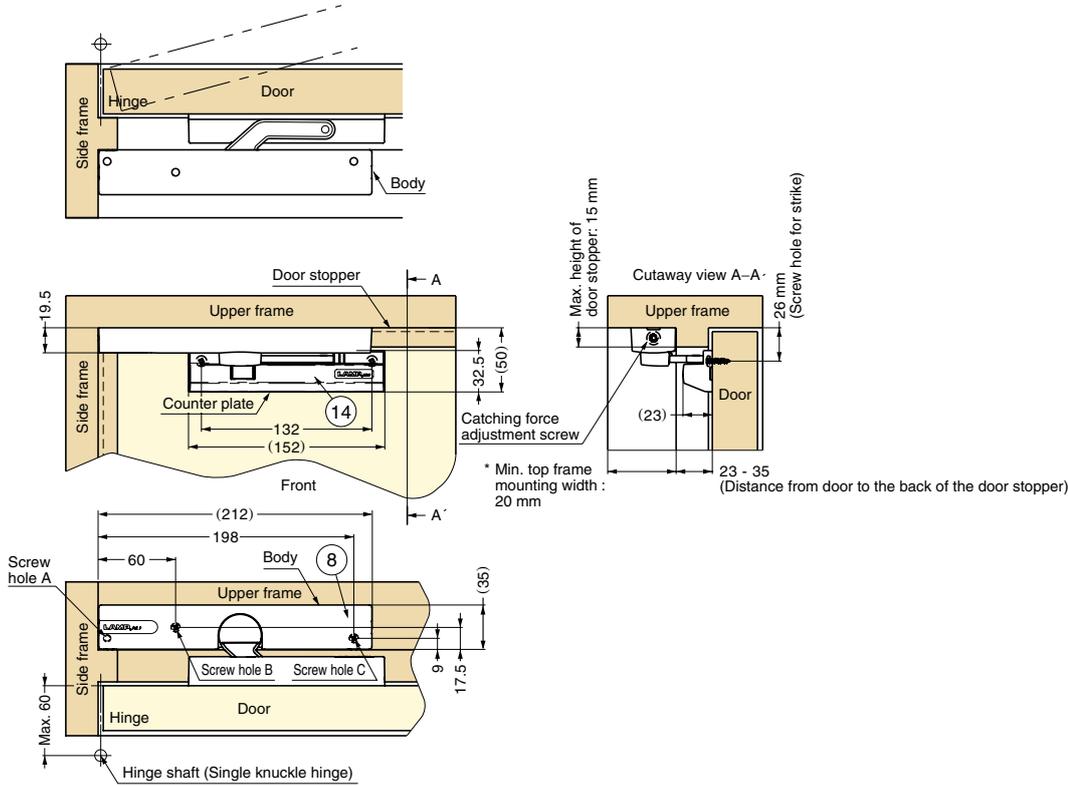

\*When the distance from door to the back of the door stopper is 20 mm - 25 mm, please use the screw hole A and C.


- SELECTION GUIDE
- LATERAL OPENING DOOR
- HES CONCEALED HINGES
- SWING DOOR
- DOOR DAMPERS
- DOOR STOPPERS
- STACKABLE PARTITION DOOR
- SLIDING DOOR

**LAMP SPACER FOR LDD-S LDD-S-P**


Latest Info



- Two types available: 2 mm thickness and 3 mm thickness.
- Can be used for Max. 6 mm thickness gap.

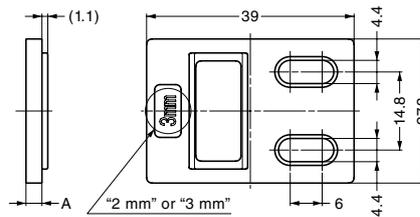


**Installation**  
(In case of 5 mm thickness gap)

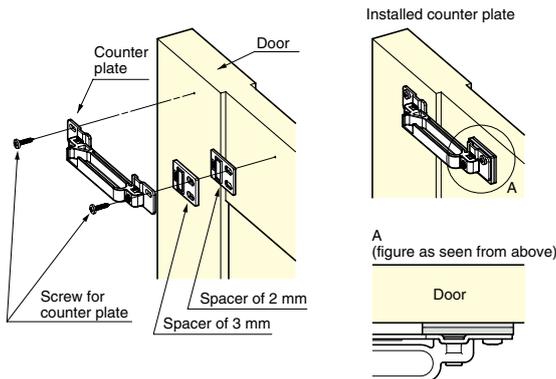

**Remarks Before Installation**

Check the gap of the door surface and choose the suitable spacer (combination of spacers).



Part Name	Material	Colour
Body	ABS	Black

Item Code	Item Name	A	Weight	Box	Carton
270-021-019	LDD-S-P2BL	2	2 g	100 pcs	1000 pcs
270-021-020	LDD-S-P3BL	3	3 g	100 pcs	1000 pcs