








**Fitting for top-running wooden doors up to 250 kg (551 lbs.), with surface mounted running track or running track flush with the ceiling. Ceiling mounting. Minimal installation height.**

**Product highlights**



-  **Aesthetics** Low installation height – only minimal gap between door and running track
-  **Comfort** High quality, long-lasting friction bearing for quiet, smooth running, even with heavier weights

**Technical specifications**

-  Max. 250 kg (551 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 3000 mm (9'10 1/8")
-  35–80 mm (1 3/8" to 3 5/32")

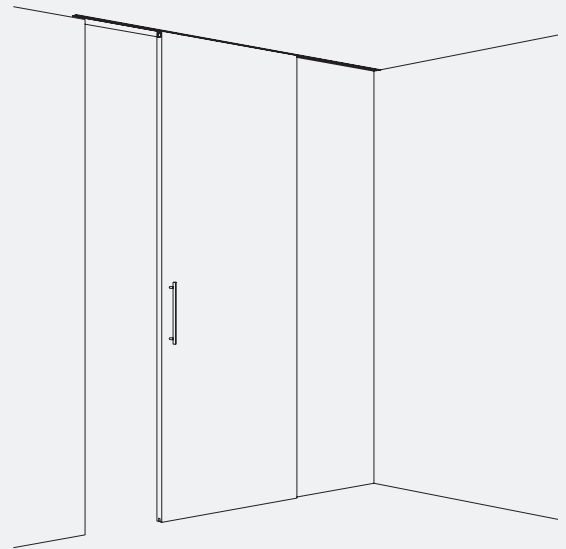








**Installation examples**

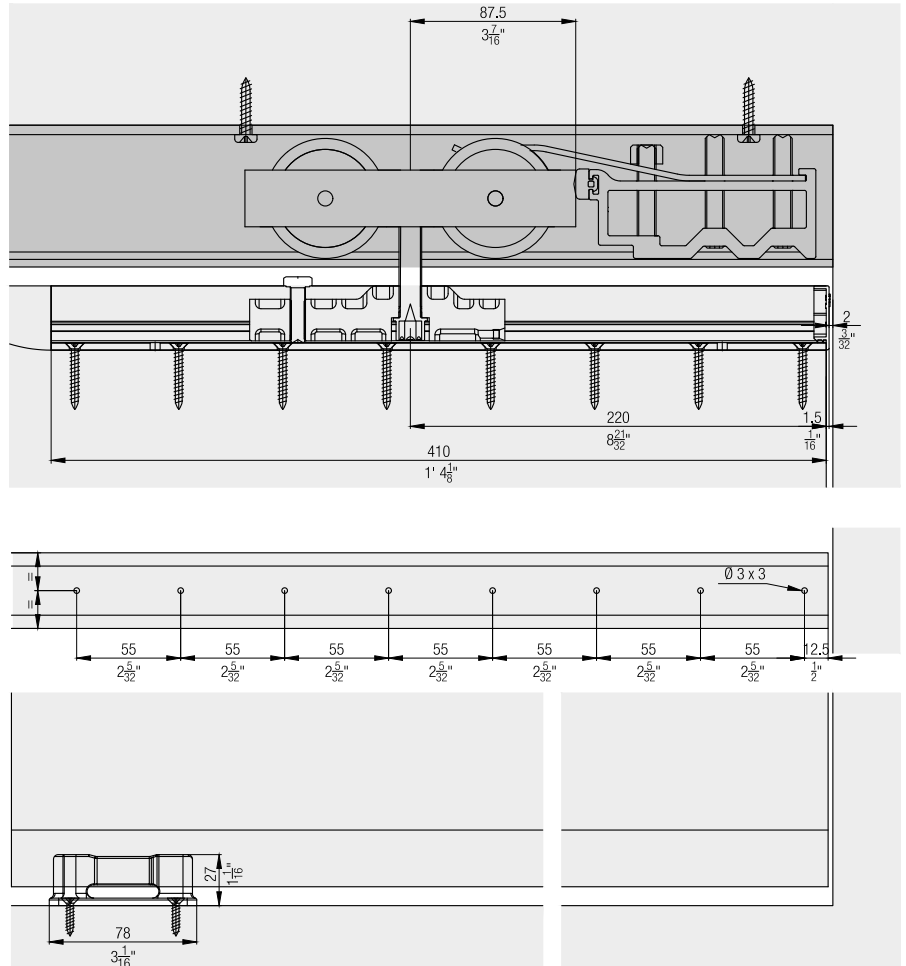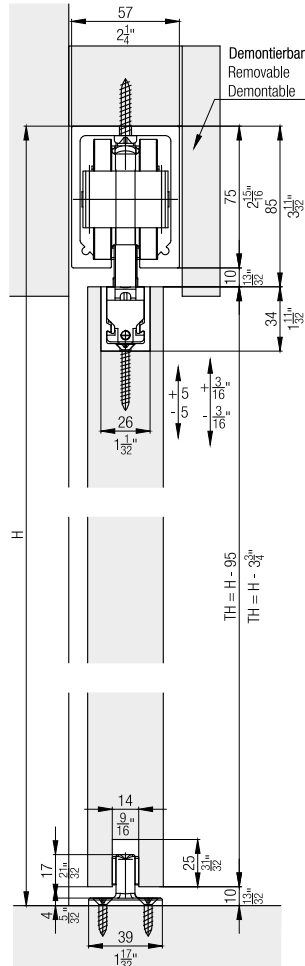

**Set for 1 wooden door up to 250 kg (551 lbs.)**

	No.
Hawa Junior 250 B, for 1 door	21001
Hawa Junior 250 B, with 2 track stoppers, for 1 door	26046


**Set consisting of:**

			No.
	21001	26046	
 Two-wheeled running gear, M12, plastic wheels	2	2	20731
 Track stopper, with adjustable retention spring	1	2	20995
 Suspension profile, 410 mm (1'4 5/32"), plate with screw M12	2	2	21005
 Cover cap for glass suspension profile, plastic, anthracite	2	2	20907
 Bottom guide, zero tolerance, groove width 14 mm (9/16"), plastic	1	1	14711
 Rubber buffer, 29x11 mm (1 5/32"x7/16"), for screw fixing	1	1	13114
 Suspension assembly locking wrench	1	1	14861

**Running tracks**


	mm (inch)	No.
	6,000 (19' 8 7/32")	20612
	cut to size	20990

**Guide tracks**





	mm (inch)	No.
 Guide track, for groove mounting, plastic, 5-piece set	3,000 (9' 10 1/8 ")	14963

**Suspension profiles**


For better distribution of the door weight, we recommend a continuous suspension profile for heavy sliding doors.

	Multi purpose suspension and retainer profile, aluminum, anodized, pre-drilled	mm (inch)	No.
		6,500 (21' 3 29/32")	10346
	cut to size	10347	

**Accessories**


	No.
 Bottom door stopper, with centering, stainless steel look	21473
 Bottom door stopper, with centering, chrome-plated, matt	20773
 Hawa assembly wedge, for 1 door	15770
 Connecting pins to profiles, 2-piece set	21347

Further installation examples

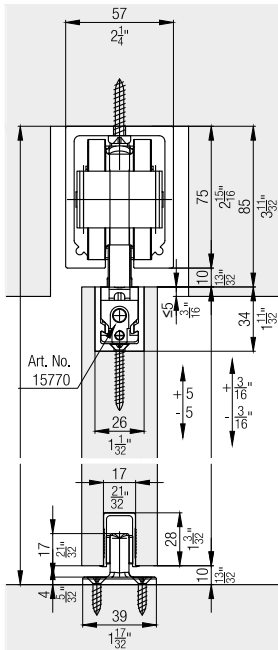

Hawa Confort 160

The convenient solution for inadequate fastening options in brittle sub-floors or in the area of floor heating. This bottom guide is mounted on the wall. Details and accessories from page 476.

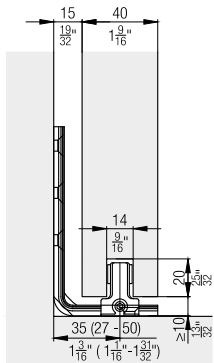

Accessories

- Hawa Junior bottom guides for wall mounting from page 476
- General accessories from page 487

Planning/execution

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).