





EASi DISK



2X **AAA** | 1,5V
ALKALINE | LR03 / 24A

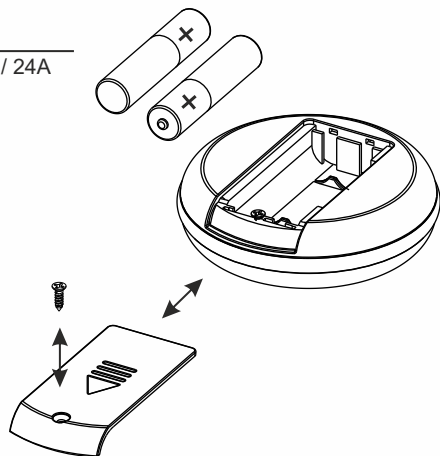

EASi DISK

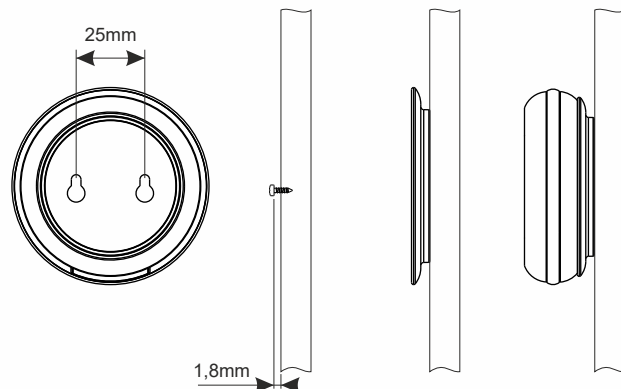


EASi DRIVER GROUP SETUP








SET GROUP 1

SET GROUP 2

SET GROUP 3

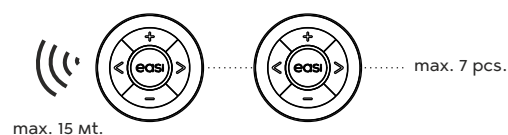

EASi DISK PAIRING

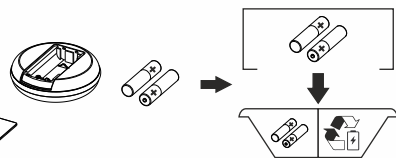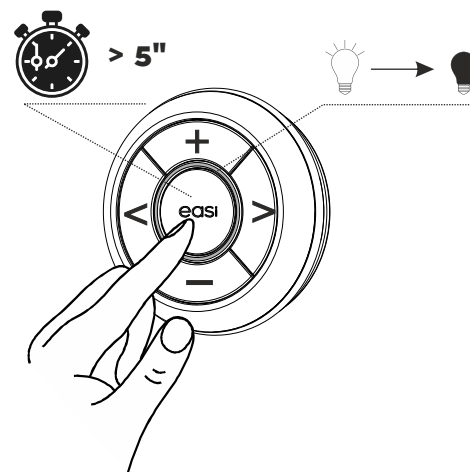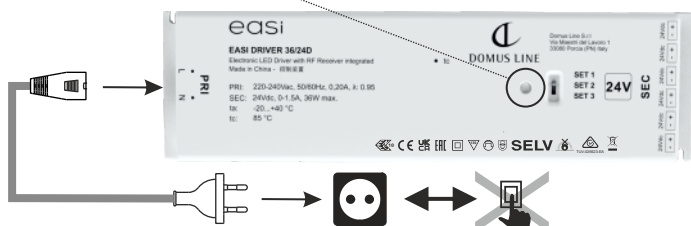

EASi DISK


M0011000006_r2 p.1/2




EASi DISK GROUP SELECTOR




GROUP 1 + GROUP 2




GROUP 1 + GROUP 3






GROUP 2 + GROUP 3



GROUP 1 + GROUP 2 + GROUP 3

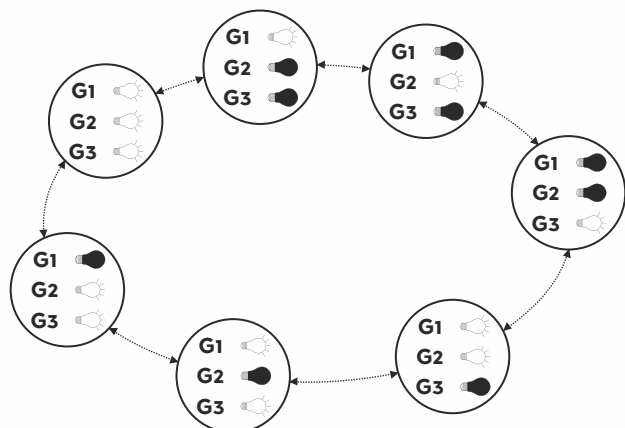


EASi DISK D-M SELECTOR

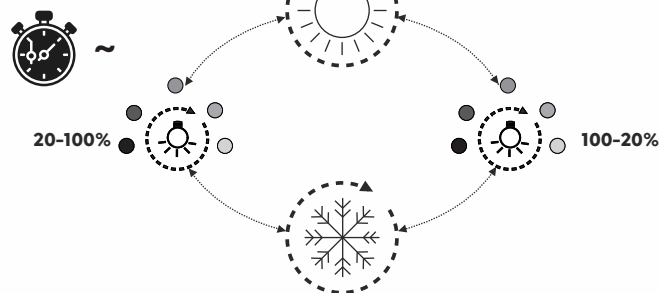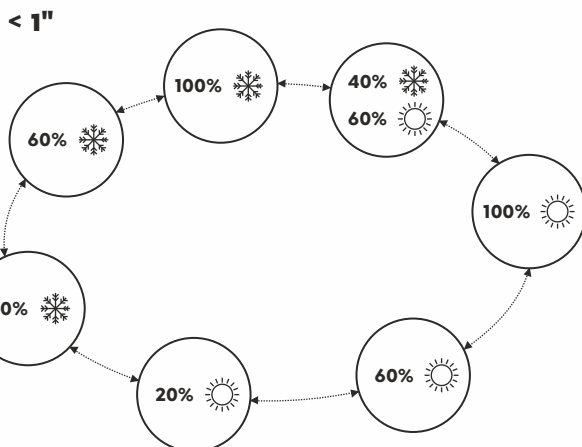


EASi DISK SETUP




D-MOTION (D-M)



STANDARD (W)




EASi DISK STANDARD SELECTOR

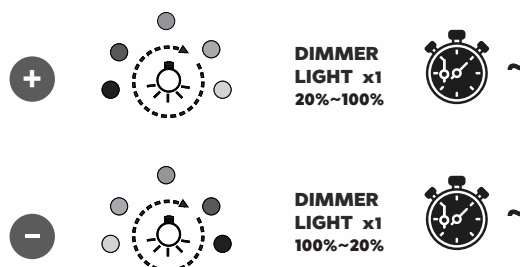




EASi DRIVER


EASi DRIVER 36W

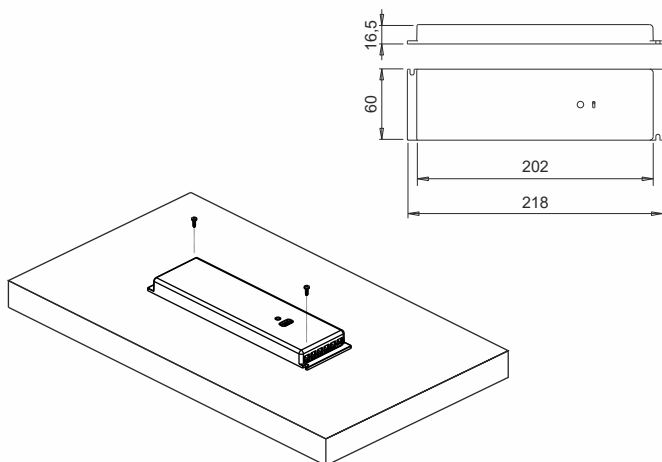

EASi DRIVER 72W

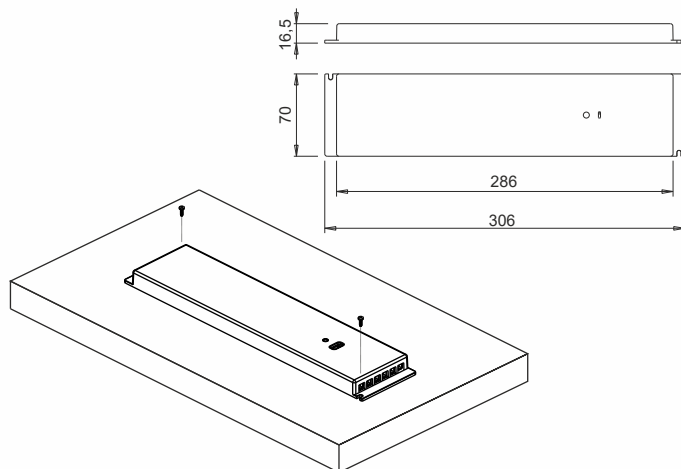


EASi DRIVER 36/12R

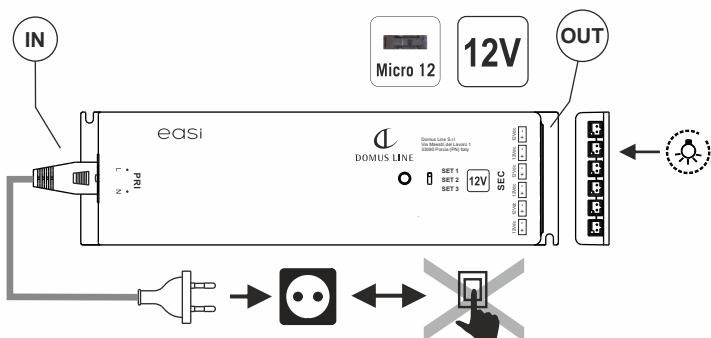


PRI: 220-240Vac, 50/60Hz, 0.20A, cos (φ) 0.15C-0.95
SEC: 12Vdc, 0-3A, 0-36W
ta: -20...+40°C tc: max. 90°C

EASi DRIVER 36/24D

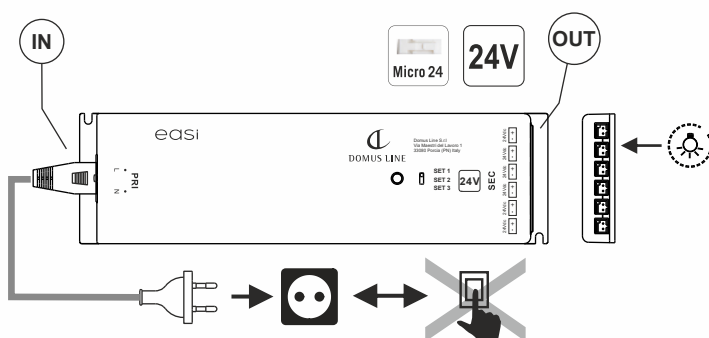


PRI: 220-240Vac, 50/60Hz, 0.20A, cos (φ) 0.15C-0.95
SEC: 24Vdc, 0-1.5A, 0-36W
ta: -20...+40°C tc: max. 85°C

EASi DRIVER 72/12R

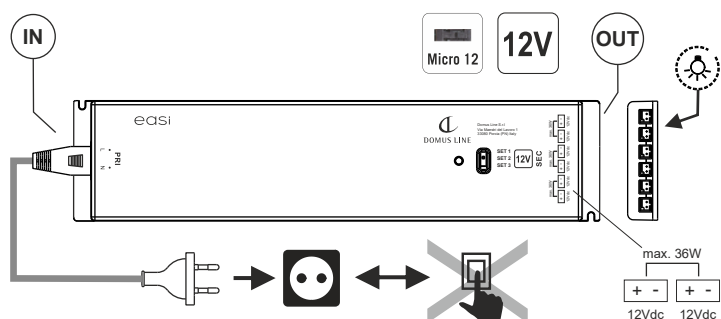


PRI: 220-240Vac, 50/60Hz, 0.35A, cos (φ) 0.15C-0.95
SEC: 12Vdc, 0-6A, 0-72W
ta: -20...+40°C tc: max. 90°C

EASi DRIVER 72/24D

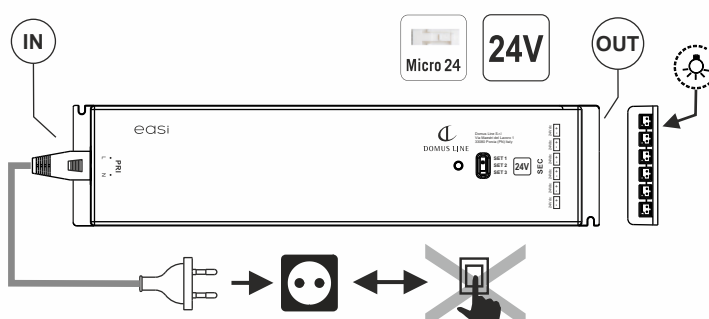

PRI: 220-240Vac, 50/60Hz, 0.35A, cos (φ) 0.15C-0.95
SEC: 24Vdc, 0-3A, 0-72W
ta: -20...+40°C tc: max. 90°C




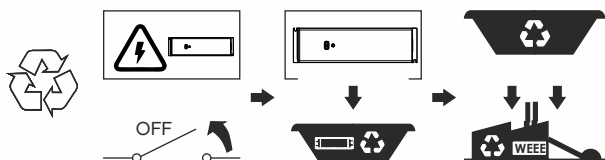


EASi DRIVER



EASi DRIVER

FOR AUSTRALIA AND NEW ZEALAND

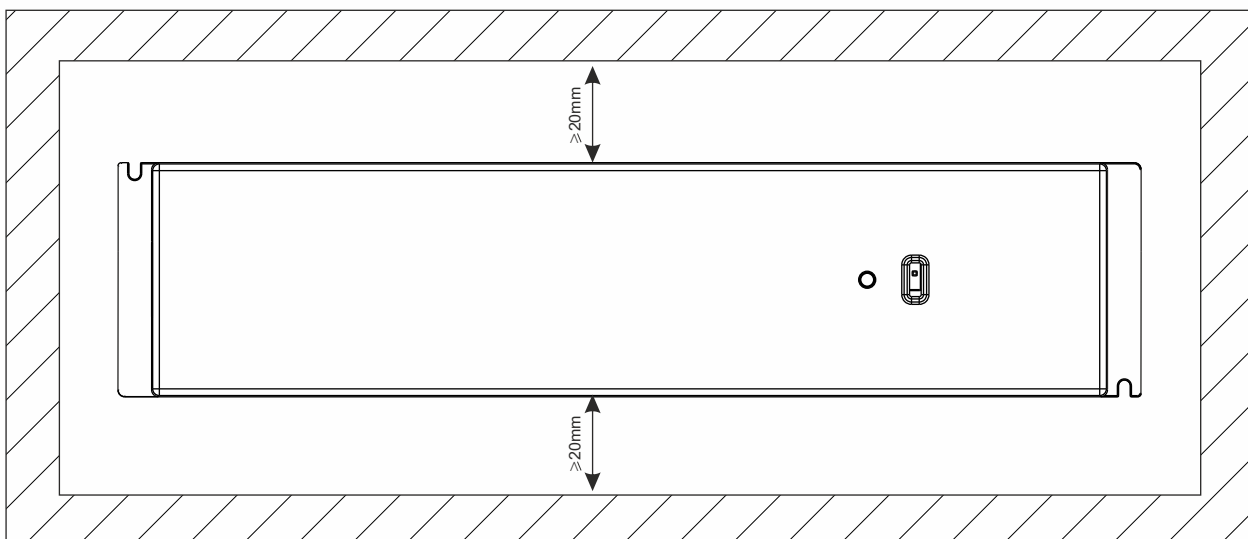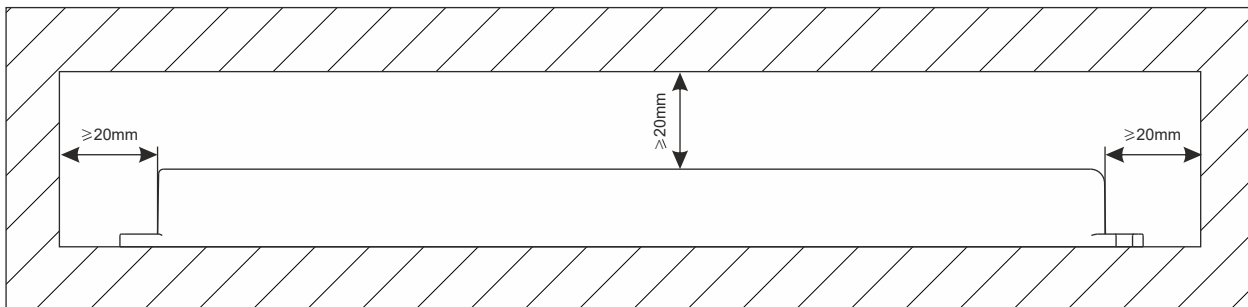

Do-not-cover

An independent controlgear that can be used where normally flammable materials, including building insulation, are or may be present, but cannot be abutted against any material and cannot be covered in normal use.

