

LP-AF8A Low Profile Autofit Female

INDUSTRY FIT:    

SPECIFICATIONS:

LOW PROFILE LP RANGE

Low Profile clip LP-AF8A provides 360 degree lateral adjustment, fitting into a 35ø hole. Mounts into a variety of materials and is used with male Low Profile clips.

LP-AF8A



USE WITH:

LP-M8A

LP-SM8AS



MATERIAL:

White acetal copolymer

MORE INFO:

Installation Guide FM-IG LP-AF8A

Layout Guide FM TD-02, FM TD-08



BENEFITS

- Hidden fixing with 8mm lateral adjustment
- Screw or glue into plywood min. 9mm thick
- Perfect panel alignment and secure mounting every time
- Remove and refit panels in any order multiple times
- 5kg pull out load per clip
- Allows for flexing and expansion of panel and support frame

APPLICATIONS

- Covered or painted and prefinished panels
- Curved panels
- Refits and upgrades of existing installations
- Where installation tolerance is required
- Can be moulded into fibreglass
- Moulded into hull

INSTALLATION: Partially exploded through section showing typical installation method

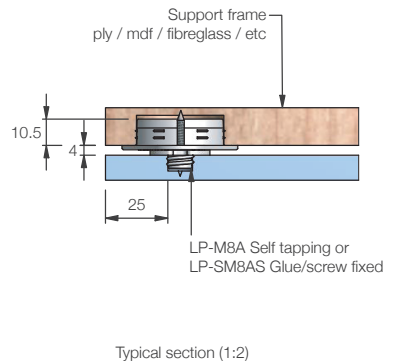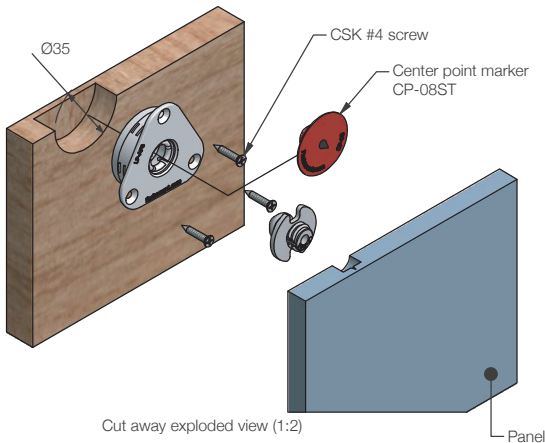

The Fastmount® multi-award winning system has revolutionized the mounting of panels. Panels can easily be removed and refitted in any sequence time after time. For further information or technical support contact: info@fastmount.com

