




OVERLAY DOOR PIVOT HINGE **PL-60**






Left (for left-lower / right-upper)



SUS

Processing on metal sheet

When M3 screws are used.

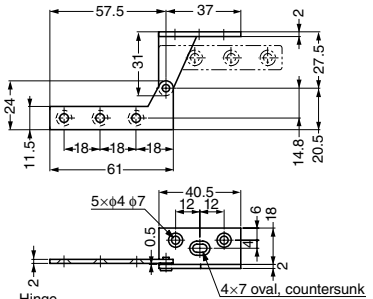

Left type shown.

Please be sure to chamfer the mounting surface for screws and rivets. In this way, screw head will not project when the body is fixed.

Item Code	Item Name	Type	Material	Finish	Door Width	Door Height	Door Thickness	Door Weight	Weight	Box	Carton
170-090-263	PL-60R	Right (for right-lower / left-upper)	Stainless Steel (SUS430)	Plain	Max. 450	Max. 700	22	Max. 4 kg /pair	27 g	100 pcs	1000 pcs
170-090-264	PL-60L	Left (for left-lower / right-upper)	Stainless Steel (SUS430)	Plain	Max. 450	Max. 700	22		27 g	100 pcs	1000 pcs



LAMP INSET DOOR PIVOT HINGE **PV-30**



• Easy installation for lower pivot spring pin.

Remarks

• Sold in pairs.

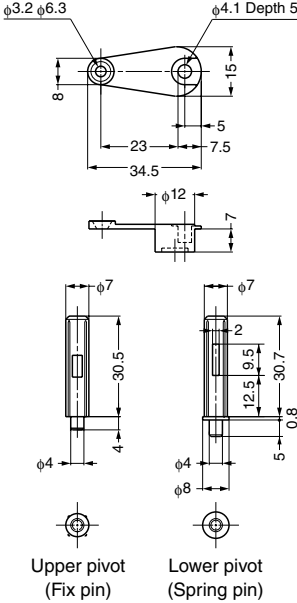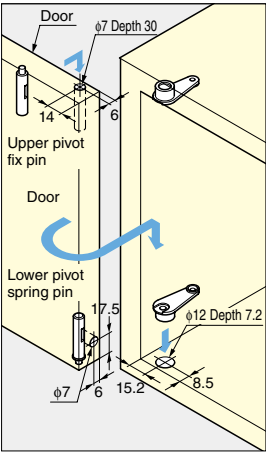

Item Code	Item Name	Material	Finish/Colour	Door Width	Door Height	Door Thickness	Door Weight	Weight	Box	Carton
170-090-060	PV-30	Polyamide (PA), Steel (Pin)	White/Nickel	Max. 450	Max. 700	Max. 21	Max. 2.6 kg/set	9 g	100 sets	1000 sets