

SELECTION GUIDE


DAMPER STAYS

TORQUE STAYS

LIFT-ASSIST STAYS

LID STAYS

Door Size Ranges: 1 pc Use (*2 pcs use possible. Torque moment becomes double.)

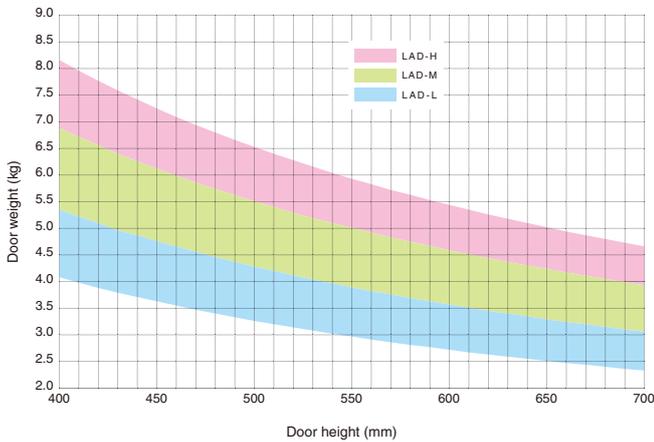

Item Code	Item Name	Material	Finish	Torque Moment/piece	Door Thickness	Weight	Carton
170-025-804	LAD-L	ABS/ Polyacetal (POM)/ Steel	Zincing/Nickel Chrome	8.0 - 10.5 N·m (81.6 - 107.1 kgf·cm)	15 - 25	545 g	20 pcs
170-025-805	LAD-M			10.5 - 13.5 N·m (107.1 - 137.7 kgf·cm)		568 g	
170-025-806	LAD-H			13.5 - 16.0 N·m (137.7 - 163.2 kgf·cm)		571 g	

TOP-OPENING

UPWARD-OPENING

DOWNWARD-OPENING

BOTTOM-OPENING

LIFT-UP

LIFT-DOWN

UP & OVER


LAMP SPACER LAD-DP



For over 25 mm thickness door.



• For counter flaps with a thickness greater than 25mm.

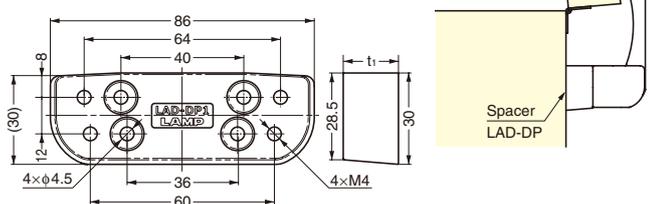


Item Code	Item Name	t ₁	Door Thickness	Material	Colour
170-028-234	LAD-DP1	18	25 - 35	Polyacetal (POM)	Grey
170-028-235	LAD-DP2	25	30 - 40		

LAMP BRACKET FOR BACK MOUNT LAD-BKT



• Allows the LAD to be mounted on a horizontal surface. Can be used together with the LAD-DP.

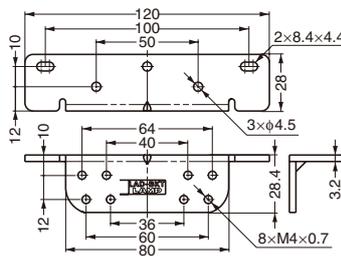

Item Code	Item Name	Material	Colour
170-028-236	LAD-BKT	Steel (SPCC)	Nickel

BIFOLDING

INSET RECEDING

OVER THE TOP

SWING DOOR