

MOVENTO with BLUMOTION – 760H | 766H




Web code – click on the code or enter it in the Product Configurator

DQCZ3Y


Planning

Space requirement in cabinet

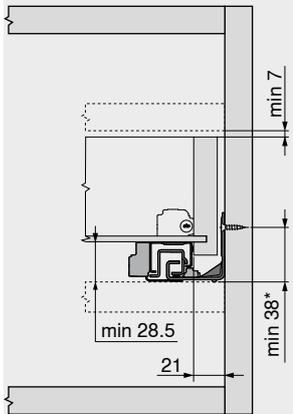


* +1 mm for assembly of the runners prior to cabinet assembly

Drawer | inner drawer

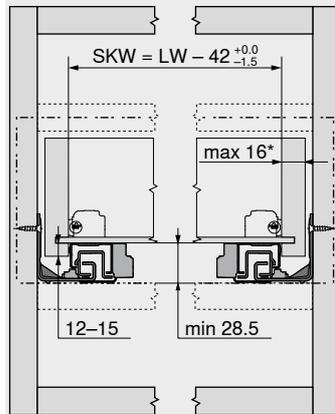


SKW Internal drawer width
 LW Internal cabinet width
 * Limited side adjustment for a drawer side panel thickness of 16 mm, but with full tolerance utilisation of the internal width of the drawer SKW

Drawer

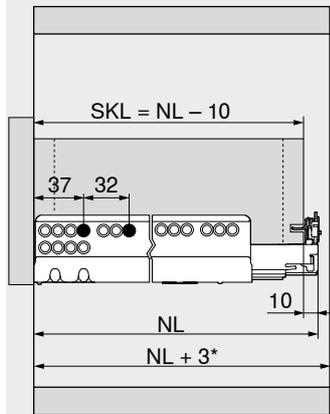


SKL Drawer length
 NL Nominal length
 * Additional +12 mm with side stabilisation

Inner drawer

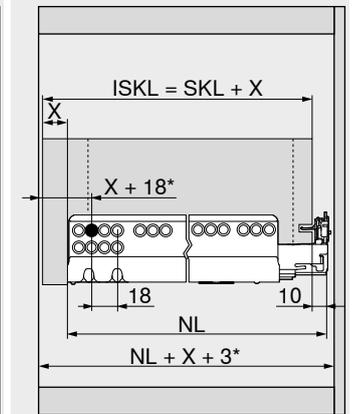


ISKL Inner drawer length
 SKL Drawer length
 NL Nominal length
 X Front thickness
 * Additional +3 mm with depth adjustment
 * Additional +12 mm with side stabilisation

Drawer assembly

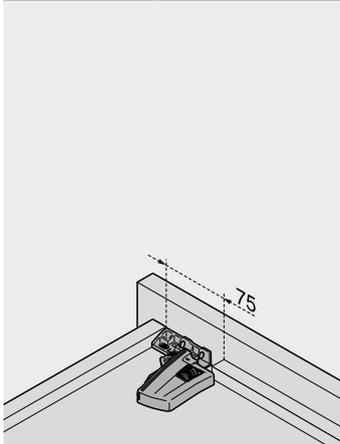

Use drilling template T65.1000.02

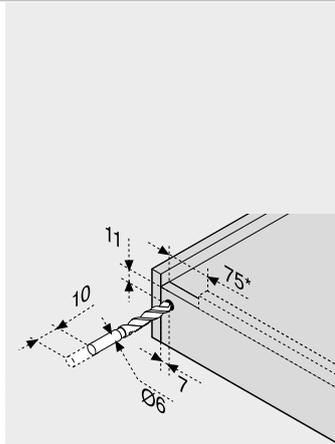

* 125 mm with TIP-ON BLUMOTION

Reference pages

Overview	411
SERVO-DRIVE for MOVENTO TANDEM	462
TIP-ON BLUMOTION for MOVENTO	502
TIP-ON for MOVENTO TANDEM	506
CABLOXX	594
Accessories	420
Attachment of runners	428

Blum services
 More technical details

602
 708

Assembly, removal and adjustment

Short URL
www.blum.com/a410

