


Fitting for top-running glass doors up to 100 kg (220 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting.

Product highlights





- ◀▶ **Flexibility** Wall mounting, ceiling integration or surface mounting on the ceiling possible
- 🕒 **Aesthetics** The technology is almost invisible, since it is contained within the ceiling-integrated running profile
- 🕒 **Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

- ⬆️ Max. 100 kg (220 lbs.)
- ⬆️ Max. 2700 mm (8'10 5/16")
- ↔ Max. 1600 mm (5'3")
- ↔ 8-12.7 mm (5/16" to 1/2")

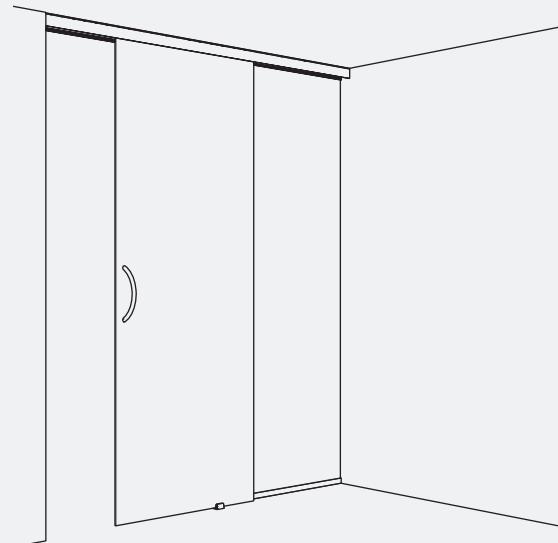

Installation examples

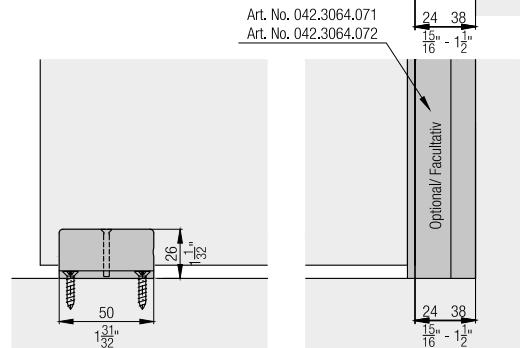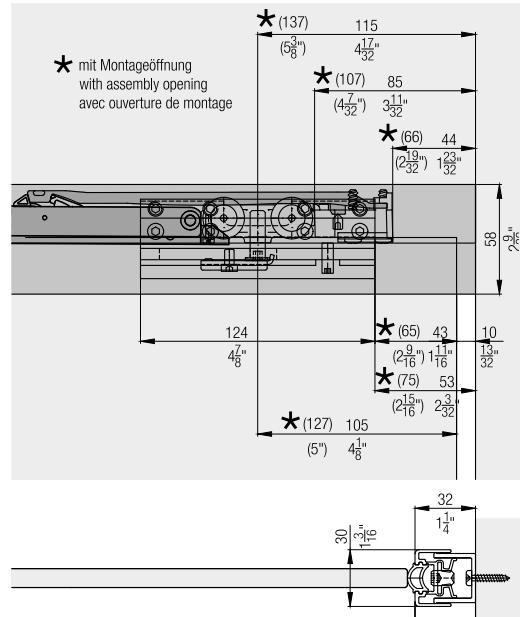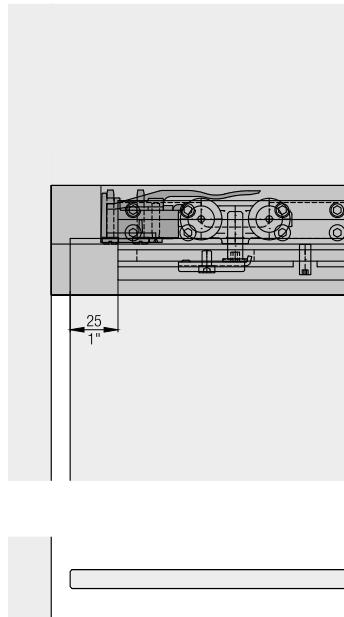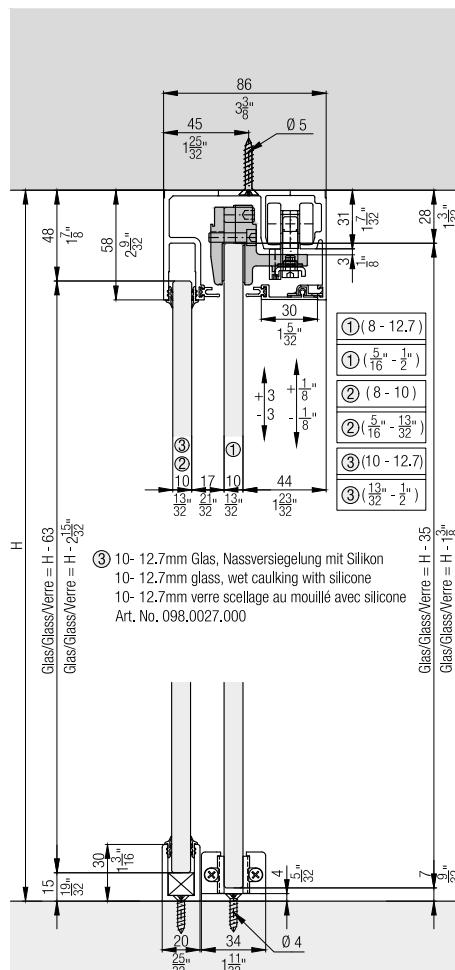



Set for ceiling or wall mounting, for 1 glass door up to 100 kg (220 lbs.)

	No.
Hawa Porta 100 GW, for 1 door	057.3091.071
Hawa Porta 100 GWF, black, for 1 door	057.3091.075


Set consisting of:

		No.	
	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	1	057.3073.072
	Stopper, without retention spring, plastic, gray	1	057.3073.071
	Suspension bolt, M8x25 mm, flat head, steel, black	2	600.0000.473
	Clamping shoe, glass thickness 6-12.7 mm (1/4"-1/2"), aluminum	2	057.3087.071
	Bottom guide, play-free adjustable, glass thickness 8-12.7 mm (5/16"-1/2"), chrome-plated, mat	1	057.3082.071
	Wall buffer, 19x10 mm (3/4"x13/32"), rubber, black	1	024.0002.046
	Clip for panel, every 300 mm (11 13/16"), plastic, gray, 12-piece set	1	057.3086.051
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	3	766.5042.120
	Stopper, with retention spring, plastic, black	1	057.3073.076
	Stopper, without retention spring, plastic, black	1	057.3073.075
	Bottom guide, playfree adjustable, black	1	057.3082.075
	Countersunk head screw, 4x20 mm, steel, zinc-plated	3	600.0000.817


Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3084.250
		3,500 (11' 5 25/32")	057.3084.350
		6,000 (19' 8 7/32")	057.3084.600
	cut to size	057.3084.990	
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3084.255
		3,500 (11' 5 25/32")	057.3084.355
		2,000 (6' 6 3/4")	057.3089.001
	cut to size	057.3089.990	
	Disposable cover Hawa Porta 100 GW/GWF, plastic, black	2,500 (8' 2 7/16")	057.3089.001
		3,500 (11' 5 25/32")	057.3089.990
		2,000 (6' 6 3/4")	057.3089.001
	cut to size	057.3089.990	


Front edge profiles

		mm (inch)	No.
	Front edge profile for 057.3084./042.3001./042.3038., aluminum, anodized	2,500 (8' 2 7/16")	042.3005.250
		3,000 (9' 10 1/8")	042.3005.300
		6,000 (19' 8 7/32")	042.3005.600
	cut to size	042.3005.990	
	Front edge profile for 057.3084., aluminum, black anodized	2,500 (8' 2 7/16")	042.3005.255
		3,500 (11' 5 25/32")	042.3005.355

Panels

		mm (inch)	No.
	Panel profile, aluminum, anodized	2,500 (8' 2 7/16")	057.3085.250
		3,500 (11' 5 25/32")	057.3085.350
		6,000 (19' 8 7/32")	057.3085.600
	cut to size	057.3085.990	
	Panel profile, aluminum, black anodized	2,500 (8' 2 7/16")	057.3085.255
		3,500 (11' 5 25/32")	057.3085.355
	Screening seal for fascias, plastic, black	20,000 (65' 7 13/32")	057.3078.002

Fixed glass support profiles

		mm (inch)	No.
	Fixed glass profil/ guide track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3056.250
		3,500 (11' 5 25/32")	057.3056.350
		6,000 (19' 8 7/32")	057.3056.600
		cut to size	057.3056.990
	Fixed glass profil/ guide track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3056.255
		3,500 (11' 5 25/32")	057.3056.355
	Sealing profile for fixed glass sup- port profile, glass thickness 8-10 mm (5/16"-13/32"), plastic, black	20,000 (65' 7 13/32")	057.3072.001

Set fixing set

		No.
Fixing set, aluminum, anodized, for fixed glass support profile 057.3057., fixed glass profil/guide track 057.3056.		057.3076.071
Fixing set, aluminum, black anodized, for fixed glass profil/guide track 057.3056.		057.3076.075

Set consisting of:

	057.3076.071	057.3076.075	No.
	Cover, aluminum, anodized	2	057.3062.001
	Thread rolling rounded head screw, M4x10 mm (5/32"x13/32"), steel, zinc-plated	15	762.7008.100
	Cover, aluminum, anodized black	2	057.3062.005

Soft close

**For soft closing in opening and closing direction
order 2 sets.**

	No.
Soft close Hawa Porta 100, Divido 100, 61-100 kg (133-220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10-60 kg (22-132 lbs.), 1 piece	042.3102.072


Set consisting of:

	Soft close, top running, 61-100 kg (133 to 220 lbs.), plastic	1	042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	042.3105.001
	Screw set soft close	1	600.0000.566
	Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic	1	042.3106.072


Wall compensation profiles

	mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	3,000 (9' 10 1/8")

Accessories


	No.
	Bottom door stopper, with centering, chrome-plated, matt
	Routing jig for assembly opening
	Groove cutter to routing jig, $\varnothing = 10$ mm (13/32"), hard metal
	Track cleaner, plastic, blue

Ceiling integration

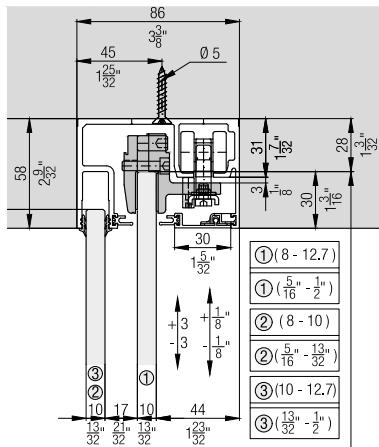


③ 10- 12.7mm Glas, Nassversiegelung mit Silikon
10- 12.7mm glass, wet caulking with silicone
10- 12.7mm verre scellage au mouillé avec silicone
Art. No. 098.0027.000

Bottom door stopper



Calculations

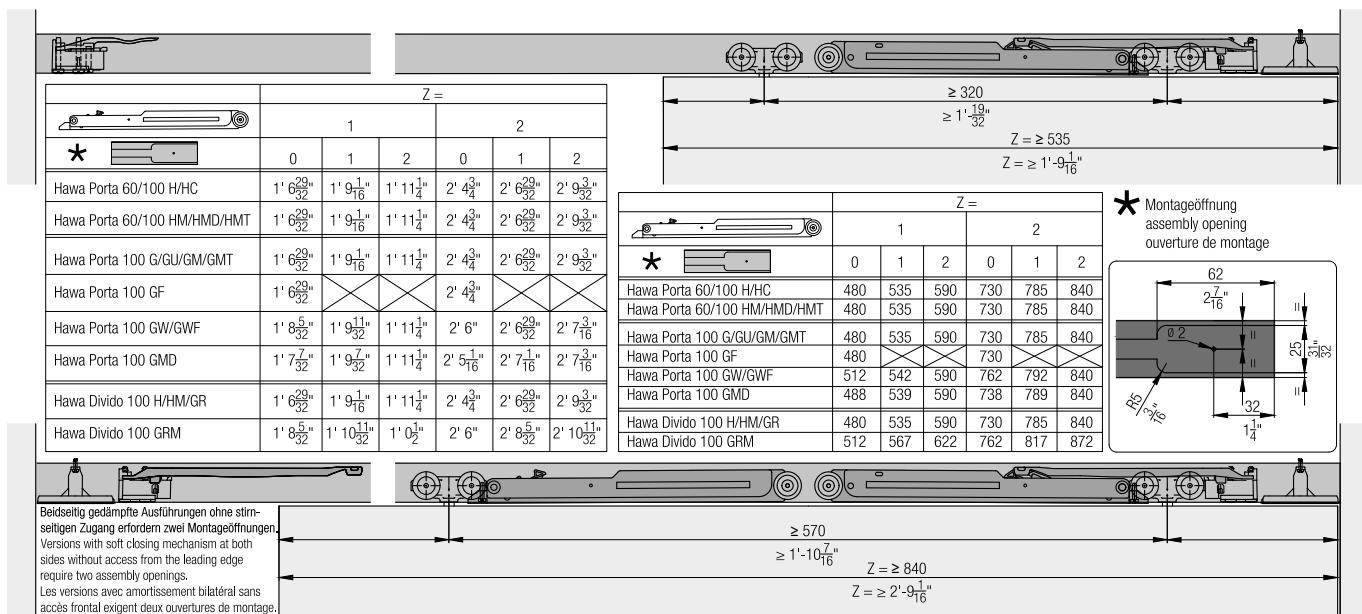

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Planning/execution