


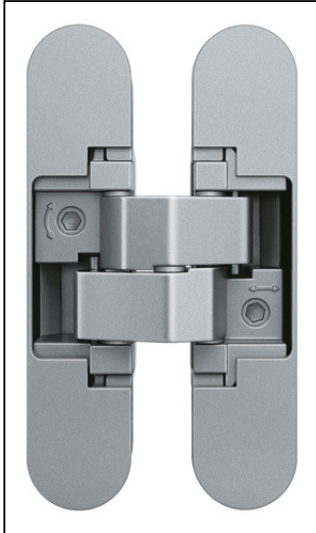

ANSELMi 3D Concealed Hinge – 110 x 24mm – 40Kg – Satin Chrome

Variant code: AN.150.3D.SC

For unrebated residential doors with 21 mm
reduced hinge frame part up to 40 kg.

Product features:

- reduced hinge frame part 21 mm
- completely concealed hinge system
- for timber and aluminium frames
- for unrebated residential doors
- 3D adjustment (side +/- 1.5 mm, height +/- 2.5 mm, compression +/- 1.0 mm)

The load capacity mentioned above refers to the
use of 2 hinges per door leaf (900 x 2100 mm).

Technical drawing of a metal plate with the following dimensions:

- Overall length: 1100 mm
- Overall width: 110 mm
- Distance from top edge to center of top holes: 105 mm
- Distance from bottom edge to center of bottom holes: 105 mm
- Distance between centers of top holes: 92 mm
- Distance between centers of bottom holes: 92 mm
- Distance from left edge to center of left holes: 24 mm
- Distance from right edge to center of right holes: 24 mm
- Width of the central slot: 13.7 mm