
SWS HARDWARE
Tel: 01626 333900
Email: info@swshardware.com

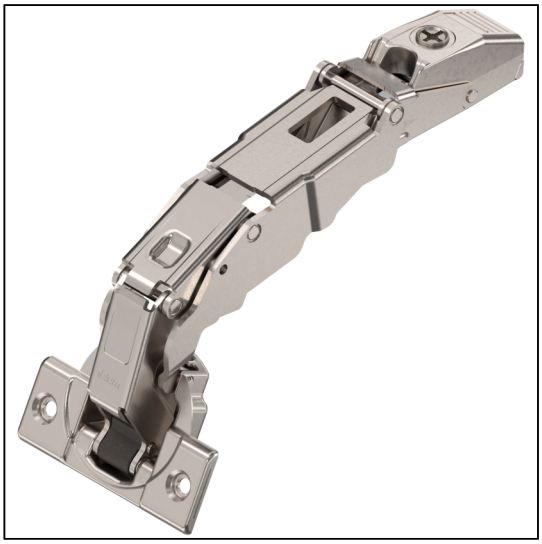

Blum Clip Top Hinge - 155° Nil Protrusion Overlay Sprung - Nickel - Screw-on

Variant code: 71T7550

Blum CLIP top - 155° Overlay Sprung Hinge - Nickel is designed to deliver extended opening access and reliable self-closing performance in overlay cabinet applications. Featuring an integrated **sprung mechanism**, the hinge provides controlled and consistent closing action without additional components. The wide **155° opening angle** improves accessibility to cabinet interiors, making it particularly suitable for installations where greater door clearance is required.

Designed for **overlay cabinet doors**, the final overlay dimension is determined by mounting plate selection, allowing flexibility across a range of cabinet constructions. As part of the Blum CLIP top system, the hinge clips securely onto compatible mounting plates using a tool-free attachment method, enabling efficient installation and simplified adjustment. Three-dimensional adjustment allows precise vertical, lateral and depth positioning to achieve accurate alignment and consistent door gaps.

This hinge is available in both **Screw-on and Inserta boss fixing configurations**, providing flexibility across different installation methods and production environments. The Screw-on version offers traditional mechanical retention within the hinge cup, while the Inserta version incorporates integrated expansion dowels for rapid installation into pre-drilled cup holes. Both options are engineered to ensure secure anchoring and long-term durability. Manufactured from durable nickel-plated steel, the hinge offers a clean and neutral finish suitable for a wide variety of cabinetry styles while maintaining compatibility within the Blum hinge platform.

Product Features

- **155° wide opening angle** for enhanced cabinet access
- Integrated **sprung mechanism** for self-closing action
- Designed for **overlay door applications**

SWS HARDWARE

Tel: 01626 333900
Email: info@swshardware.com

- Available in **Screw-on and Inserta boss fixing options**
- Durable **nickel-plated steel finish**
- Compatible with Blum **CLIP top mounting plates**
- Tool-free clip-on hinge assembly
- Three-dimensional adjustment capability

Product Benefits

- Provides improved interior access compared to standard hinge angles
- Delivers reliable and consistent self-closing performance
- Supports clean overlay cabinet aesthetics
- Offers installation flexibility for different production requirements
- Enables precise alignment and even door gaps
- Suitable for residential and light commercial interiors

Technical Characteristics

- Requires compatible Blum CLIP top mounting plates
- Screw-on version requires correct hinge cup drilling preparation
- Inserta version uses integrated expansion dowels for rapid fitting
- Adjustable vertically, laterally and in depth
- Designed for integration within Blum cabinet systems
- Suitable for overlay cabinet constructions requiring increased opening

Tel: 01626 333900
Email: info@swshardware.com

Applications

This hinge is intended for overlay cabinet door installations where extended opening access is required. The **155° opening angle** allows improved reach into storage areas, making it suitable for kitchens, storage units and fitted furniture. The integrated sprung mechanism combined with either **Screw-on or Inserta fixing options** ensures dependable closing performance and secure installation in residential and light commercial joinery projects requiring durability and precise alignment.

Property	Value
Finish	Nickel
Opening angle (°)	155
Application	Overlay
Boss	Screw-on
Closing Mechanism	Sprung
Boss Drilling Depth (mm)	11.7
Max Door Thickness (mm)	31
Hinge Type	Wide Angled