
SWS HARDWARE

Tel: 01626 333900
Email: info@swshardware.com

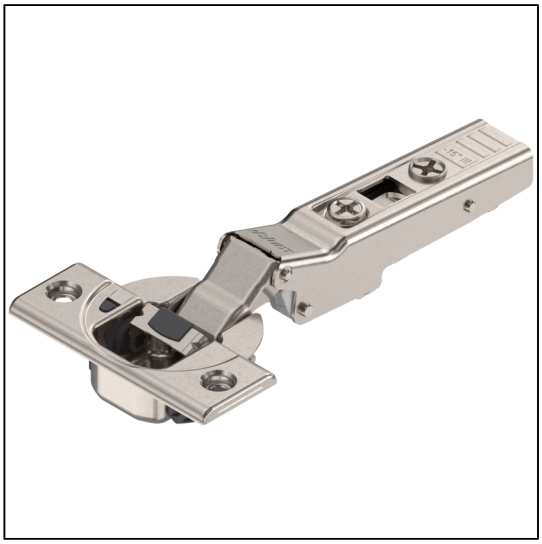

Blum Clip Top Hinge III - 15° Half Overlay BLUMOTION Sprung - Nickel - Screw-on

Variant code: 79B3453

Blum CLIP top Hinge III - 15° Half Overlay BLUMOTION Sprung - Nickel is designed for cabinet doors installed on shallow angled cabinet constructions where standard hinge geometry cannot achieve correct alignment. Part of the **Blum CLIP top BLUMOTION hinge system**, this hinge integrates soft-close technology directly into the hinge mechanism to deliver smooth and controlled door closing without additional dampers. Engineered to Blum's precision manufacturing standards, it provides reliable performance in specialised cabinet installations.

The hinge features a **15° hinge geometry**, making it suitable for cabinets installed at shallow angles often found in corner cabinetry and bespoke furniture layouts. Designed for **half overlay cabinet door configurations**, the hinge allows adjacent doors to share a central cabinet panel while maintaining consistent alignment and balanced reveals. The hinge clips securely onto compatible Blum mounting plates using the **tool-free CLIP top system**, enabling efficient installation and simple removal for adjustment or maintenance.

Manufactured from durable steel with a **nickel-plated finish**, the hinge provides corrosion resistance and a neutral appearance suitable for most cabinet interiors. The hinge cup uses a **screw-on boss fixing**, ensuring secure mechanical attachment to the cabinet door when installed into correctly prepared hinge cup drilling.

Product Features

- **15° hinge geometry** for angled cabinet installations
- Integrated **BLUMOTION soft-close mechanism**
- Designed for **half overlay cabinet door applications**
- **Screw-on boss fixing**

Tel: 01626 333900
Email: info@swshardware.com

- Durable **nickel-plated finish**
- **Tool-free CLIP hinge attachment**
- **Three-dimensional adjustment capability**

Product Benefits

- Provides smooth and quiet **soft-closing door operation**
- Enables hinge installation on **shallow angled cabinet constructions**
- Supports cabinet layouts using **shared centre panels**
- Ensures secure installation with **screw-on fixing**
- Allows precise door alignment and consistent reveals
- Suitable for residential and light commercial cabinetry

Technical Characteristics

- Requires compatible **Blum CLIP top mounting plates**
- **Screw-on boss fixing** requires correct hinge cup drilling preparation
- Adjustable vertically, laterally and in depth
- Steel hinge construction with **nickel-plated protective finish**
- Designed for **angled cabinet door installations**
- Correct hinge and mounting plate pairing ensures optimal performance

Applications

Suitable for **half overlay cabinet doors** used in angled cabinet constructions such as corner units, diagonal cabinets and bespoke furniture installations. The **15° hinge geometry** allows

Tel: 01626 333900
Email: info@swshardware.com

correct door positioning on shallow angled cabinet layouts, while the integrated **BLUMOTION soft-close mechanism** ensures controlled and quiet closing. The **screw-on boss fixing** provides secure installation within standard cabinet door materials, making the hinge suitable for kitchens, wardrobes and fitted furniture requiring specialised hinge geometry and reliable soft-closing performance.

Property	Value
Finish	Nickel
Opening angle (°)	15
Application	Half Overlay
Boss	Screw-on
Closing Mechanism	Sprung
Boss Drilling Depth (mm)	13
Hinge Type	Angled