
SWS HARDWARE

Tel: 01626 333900
Email: info@swshardware.com

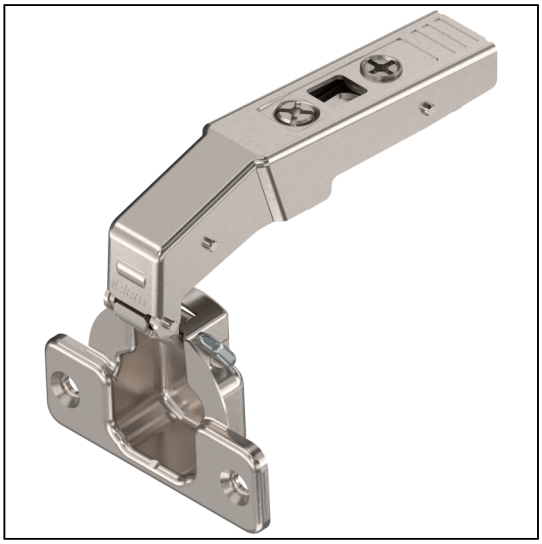

Blum Clip Top Hinge - 95° Blind Corner Inset Sprung - Nickel - Screw-on

Variant code: 79T9550

Blum CLIP top Hinge - 95° Blind Corner Inset Sprung - Nickel is designed for cabinet installations where inset doors are used in **blind corner cabinet configurations**. Manufactured by **Blum**, a globally recognised specialist in cabinet hardware, this hinge forms part of the **CLIP top hinge system**, delivering precise adjustment, reliable self-closing performance and straightforward installation for professional cabinetry.

The hinge features a **95° opening angle**, making it particularly suitable for **blind corner cabinet layouts** where space constraints require controlled door movement. Designed for **inset cabinet doors**, the hinge allows the door to sit flush within the cabinet frame while maintaining accurate door reveals and consistent alignment. The integrated **sprung hinge mechanism** provides dependable self-closing action, ensuring smooth and controlled door movement during everyday use.

As part of the Blum CLIP top system, the hinge clips securely onto compatible mounting plates using the **tool-free CLIP mechanism**, allowing fast installation and easy removal during cabinet fitting or adjustment. Integrated **three-dimensional adjustment** enables precise vertical, lateral and depth positioning to achieve accurate door alignment and consistent gaps across cabinetry.

This variant uses **Screw-on boss fixing**, providing secure mechanical attachment within the cabinet door when installed into correctly prepared hinge cup drilling. The screw-on fixing method ensures strong hinge retention within the door material and is widely used in cabinet manufacturing and bespoke joinery installations. Manufactured from durable steel with a **nickel-plated finish**, the hinge offers corrosion resistance and a clean, neutral appearance suitable for a wide range of cabinetry styles.

Product Features

- **95° opening angle** suited to blind corner

Tel: 01626 333900
Email: info@swshardware.com

cabinet configurations

- **Integrated sprung hinge mechanism** for reliable self-closing action
- Designed for **blind corner inset cabinet door applications**
- **Screw-on boss fixing** for secure hinge installation
- Durable **nickel-plated steel construction**
- Compatible with **Blum CLIP top mounting plates**
- **Tool-free CLIP hinge attachment system**
- **Three-dimensional hinge adjustment** capability

Product Benefits

- Enables reliable hinge operation in **blind corner cabinet layouts**
- Provides consistent **self-closing door performance**
- Supports clean **flush inset cabinet aesthetics**
- Ensures secure hinge installation through **mechanical screw fixing**
- Allows precise door alignment and professional cabinet finishing
- Integrates seamlessly within the **Blum hinge platform**

Technical Characteristics

- Requires compatible **Blum CLIP top mounting plates**
- Designed for **inset cabinet door construction**
- **Screw-on boss fixing requires correct hinge cup drilling preparation**

SWS HARDWARE

Tel: 01626 333900
Email: info@swshardware.com

- Adjustable vertically, laterally and in depth
- Manufactured from **steel with nickel-plated protective finish**
- Correct hinge and mounting plate pairing ensures optimal hinge performance

Applications

This hinge is intended for **blind corner cabinet installations** where inset doors are used and cabinet geometry restricts standard hinge opening angles. The **95° opening angle** ensures controlled door movement within confined cabinet spaces, while the **sprung hinge mechanism** provides dependable self-closing performance. The **Screw-on boss fixing** offers secure hinge attachment, making it suitable for kitchen cabinetry, fitted furniture and bespoke joinery projects requiring durable and precisely adjustable cabinet hardware.

Property	Value
Finish	Nickel
Opening angle (°)	95
Application	Inset
Boss	Screw-on
Closing Mechanism	95
Boss Drilling Depth (mm)	12.3
Hinge Type	Blind Corner