


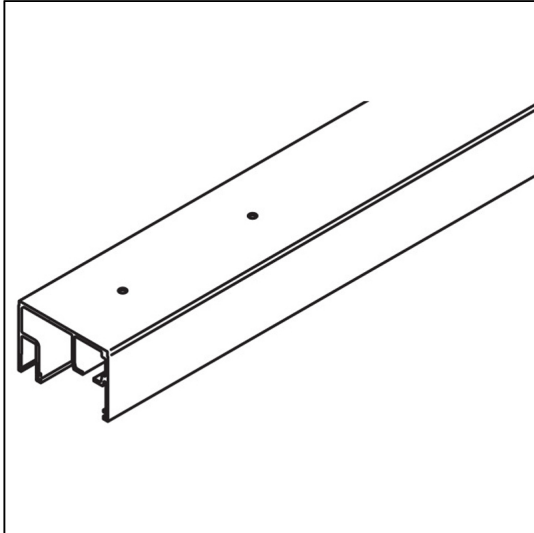

## Hawa Porta 100 GWF Top Track – Anodized – 2500mm

**Variant code: 057.3084.250**

The **Hawa Porta 100 GWF Top Track** is a premium, Swiss-engineered sliding door solution designed for high-end residential and commercial interior spaces. This specific 2500mm anodized aluminium track is the backbone of a sophisticated top-running system, allowing for the seamless integration of both a sliding glass door and a fixed glass panel within a single, streamlined profile.

### Hawa Porta 100 GWF

The "GWF" designation stands for **Glass/Fixed**, highlighting the track's unique capability to manage both moving and stationary glass elements. Its **anodized finish** provides a durable, corrosion-resistant surface with a sleek, silver-matte aesthetic that complements modern architectural styles.

#### Key Features & Benefits

- **Dual Functionality:** Integrated support for a fixed glass panel alongside the sliding track eliminates the need for redundant hardware.
- **Weight Capacity:** Robustly supports glass doors up to **100 kg (220 lbs)**, suitable for heavy-duty tempered or laminated glass.
- **Minimalist Design:** At only 58 mm in height, the track can be surface-mounted or recessed into the ceiling for an "invisible" look.
- **Silent Operation:** Precision ball-bearing rollers ensure a whisper-quiet, smooth-gliding experience.
- **Swiss Precision:** Engineered by Hawa Sliding Solutions, ensuring long-term reliability and maintenance-free performance.

#### Technical Specifications



| Attribute          | Specification                          |
|--------------------|----------------------------------------|
| Material           | High-grade Aluminum, Anodized (Silver) |
| Length             | 2500 mm (8' 2 7/16")                   |
| Profile Dimensions | 86 mm x 58 mm                          |
| Max Door Weight    | 100 kg (220 lbs)                       |
| Glass Thickness    | 8 – 12.7 mm (5/16" to 1/2")            |
| Max Door Width     | 1600 mm (5' 3")                        |
| Max Door Height    | 2700 mm (8' 10")                       |
| Mounting           | Ceiling or Flush-Ceiling Integration   |

## Hawa Porta 100 GWF vs. Standard Sliding Track

| Feature                 | Hawa Porta 100 GWF                   | Standard Utility Track              |
|-------------------------|--------------------------------------|-------------------------------------|
| Fixed Glass Integration | Built-in fixed glass support profile | Requires separate U-channels        |
| Aesthetics              | Concealed hardware; anodized finish  | Visible brackets; industrial finish |
| Closing Action          | Optional Soft-Close & Self-Closing   | Basic rubber bumpers                |
| Durability              | Swiss-engineered for high-cycle life | Standard residential grade          |
| Installation            | Flush ceiling or surface options     | Typically surface-mount only        |

## Frequently Asked Questions (FAQ)

1. Does this track require glass cut-outs?

No. The Hawa Porta 100 GWF uses advanced clamping shoe technology, allowing the glass to be secured without the need for drilling or cut-outs.

2. Can I add a soft-close mechanism later?

Yes. The system is compatible with Hawa's optional soft-closing and self-closing units, which can be retrofitted or integrated during initial installation for a gentle, controlled stop.

3. Is the 2500mm track cuttable?

Absolutely. The aluminium profile can be precision-cut on-site to fit your specific opening width.

4. What is the difference between GW and GWF?



**SWS**  
HARDWARE

Tel: 01626 333900  
Email: [info@swshardware.com](mailto:info@swshardware.com)

The GW model is designed for a single sliding glass door only. The GWF (this model) includes an additional integrated profile to hold a fixed glass panel, creating a complete glass wall solution.