
SWS HARDWARE

Tel: 01626 333900
Email: info@swshardware.com

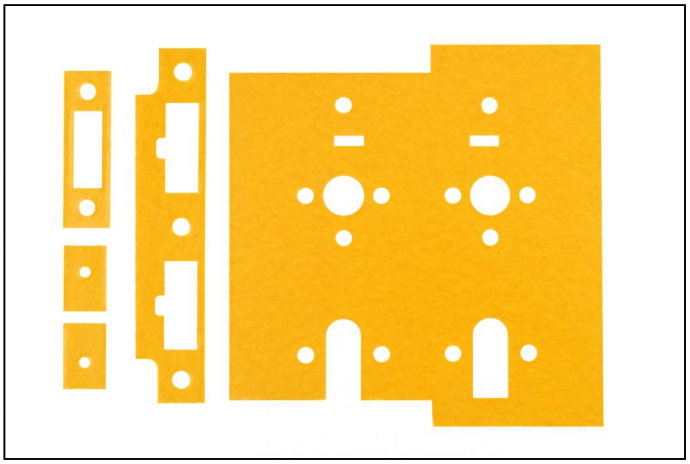

Thick Self Adhesive Interdens Intumescent to suit 2405 DIN Lock - 30 Mins - 1mm

Variant code: 2405.INT30

The **Thick Self-Adhesive Interdens Intumescent for 2405 DIN Lock** is designed to help maintain the fire integrity of timber fire doors by sealing the lock recess during a fire. Precision cut to suit the **2405 DIN lock case**, this high-performance intumescent liner provides a simple and effective solution for certified fire door installations and maintenance projects.

Manufactured from **Mono Ammonium Phosphate**, the intumescent material expands rapidly when exposed to high temperatures, helping to seal gaps created around the lock case and slowing the spread of fire and smoke. The **self-adhesive backing** enables quick, clean and accurate installation without the need for additional adhesive. Available in both **1mm thickness for FD30 (30-minute)** fire doors and **2mm thickness for FD60 (60-minute)** fire doors, it provides flexibility for a wide range of fire-rated door assemblies.

Suitable for new installations, fire door maintenance and refurbishment projects, the Thick Self-Adhesive Interdens Intumescent provides a reliable solution for helping maintain the certified fire performance of compatible DIN lock installations.

Product Features

- Thick self-adhesive Interdens intumescent for 2405 DIN lock
- Precision cut to suit compatible DIN lock cases
- Manufactured from Mono Ammonium Phosphate
- Self-adhesive backing for fast installation
- Available in 1mm thickness for FD30 (30-minute) fire doors
- Available in 2mm thickness for FD60 (60-minute) fire doors
- Designed to fit behind the lock case
- Suitable for fire door installations and maintenance

Product Benefits

Tel: 01626 333900
Email: info@swshardware.com

- **Helps maintain the fire integrity of timber fire door assemblies**
- **Expands under high temperatures to help seal gaps around the lock case**
- **Self-adhesive backing enables quick, clean and accurate installation**
- Available for both FD30 and FD60 fire-rated doors
- Reduces installation time without the need for separate adhesives
- Precision cut for a neat and consistent fit with compatible 2405 DIN locks
- Suitable for new fire door installations and refurbishment projects
- Provides a dependable solution for maintaining fire door performance

Technical Characteristics

- Product Type: Self-Adhesive Interdens Intumescent
- Compatibility: 2405 DIN Lock
- Material: Mono Ammonium Phosphate
- Backing: Self-Adhesive
- Thickness Options: 1mm or 2mm
- Fire Rating Compatibility: FD30 (1mm / 30 Minutes) or FD60 (2mm / 60 Minutes)
- Application: Behind DIN Lock Cases on Timber Fire Doors

Applications

The **Thick Self-Adhesive Interdens Intumescent for 2405 DIN Lock** is suitable for use on **timber fire doors** in **offices, schools, hospitals, hotels, apartment buildings, public buildings and residential developments**. Designed for installation behind compatible **2405 DIN lock cases**, it helps maintain the fire resistance performance of **FD30 and FD60** fire door assemblies and is ideal for both new installations and fire door maintenance projects.

Property	Value
Application	For Zoo ZDL and ZRD DIN lock cases
Fire Rating	For Zoo ZDL and ZRD DIN lock cases
Thickness (mm)	1
Suitable for	2405 DIN Lock