

# LAMP 3-WAY ADJUSTABLE CONCEALED HINGE HES3D-70

Latest Info



A  
HINGES



Passed Private 50K Cycle Test



KIDS DESIGN AWARD 2021



Without covers.

- Small HES series can be applied with Min. door thickness of 19 mm.
- Small bore depth, easy to cut out the door and jamb.
- 3-way adjustment function allows vertical, horizontal, and depth adjustment after hinge installed.
- Hinge can be split into the door side and the jamb side.

INSTRUCTION SCREW

**Remarks**

- Can not be used with LAPCON DOOR DAMPER LDD or LAPCON DOOR CLOSER LDC-N2.
- Can not be used with lid stays or door damper.
- Use below opening angle 180°.

**Parts Included**

- Countersunk head tapping screw 4 x 20 (4 pcs/hinge) SUS
- Hex key 2



HES Hinge

SELECTION GUIDE

HES CONCEALED HINGES

CONCEALED HINGES

DAMPER HINGES

TORQUE HINGES

GLASS HINGES

PIVOT HINGES

TABLETOP HINGES

DETENT HINGES

BUTT HINGES

LIFT-OFF HINGES



PIANO HINGES

SPRING HINGES


ANGLE HINGES

GRAVITY HINGES

**Locus Chart**

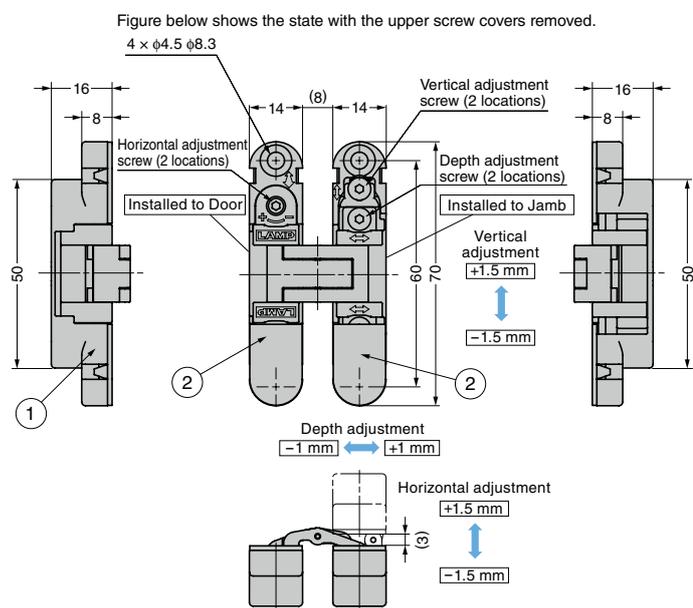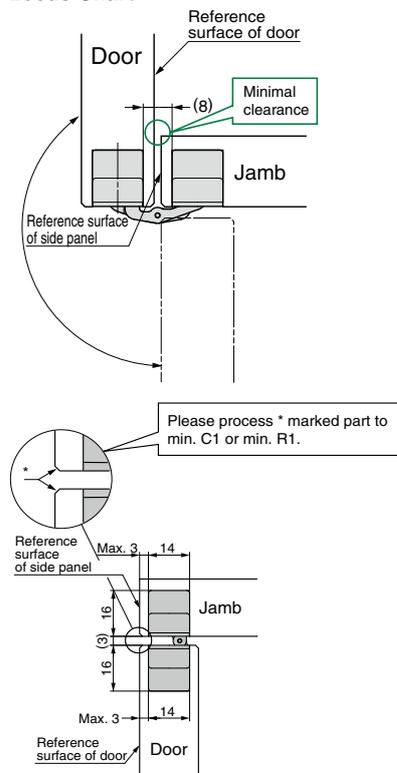

**Cut Out Dimensions**

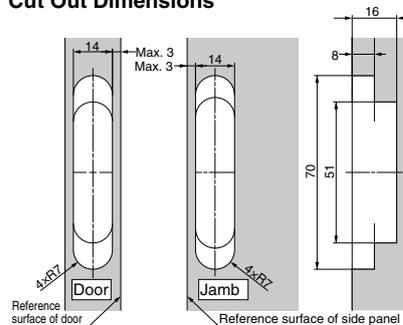

No.	Part Name	Material	Finish		
			DC	DN	BL
①	Body	Zinc Alloy (ZDC)	Satin Chrome	Dull Nickel	Black Paint
②	Cover (2 pairs)	ABS	Silver Paint	Champagne Gold Paint	Black

Item Code	Item Name	Colour	Door Width (mm)	Door Height (mm)	Door Thickness (mm)	Door Weight kg/2 pcs	Door Weight kg/3 pcs	Opening Angle	Weight (g)	Box (pcs)	Carton (pcs)
170-035-441	HES3D-70DC	Silver	Max. 600	Max. 1200	Min. 19	Max. 9	Max. 12	180°	95	2	48
170-035-442	HES3D-70DN	Champagne Gold								2	48
170-035-443	HES3D-70BL	Black								2	48

**Installation Template** This is sold singly, because they can be used on both the door and jamb.

Item Code	Item Name	Material	Colour
170-040-988	HES3D-70-TMP	Methacrylic Resin (PMMA)	Clear